

KOSDAQ

REFRIGERATOR BLOOD BANK & PHARMACEUTICAL



KRX

WORLD
CLASS
PRODUCT
OF KOREA

IGIC
ISO 13485

GMP
Good Manufacturing Practice

CE

ETL
VERIFIED

KFDA

ilShinBioBase
Since 1988

REFRIGERATOR BLOOD BANK

BB0123, 0150 SERIES

[BLOOD BANK]

Introducing Blood Bank complying with medical instrument regulation, with reliability by precise Micro-process control and comfortable space with easy handling drawers, this is essential solution for blood storage with ultimate credibility.



Main Features

BLOOD BANK SERIES



Carrying sample with it

1. REMOVEABLE RAIL DRAWER

Inner space is separated by compartment, available for classified storage of various blood backs. Air holes at the bottom of each drawer allow effective air circulation. Removable drawer is convenient for sample transfer with minimal door open time.

Maintain temperature by two fan system

2. AIR CIRCULATION SYSTEM

Built-in two fans keep strong circulation and quickly recover target temperature even after numerous times of door open.



REFRIGERATOR PHARMACEUTICAL

CC0123, 0150 SERIES

[PHARMACEUTICAL REFRIGERATOR]

CC series with strong refrigeration system is optimal for safe storage of reagents and pharmaceutical products such as vaccines that require regulated storage compliance. CC series comply with high standard medical grade requirements.

High quality stainless steel exterior/interior prevents from any chance of contamination. Stable management on temperature by micro-process controller is the essence of CC series and low noise and convenient user interface are other advantages. Visibility on temperature variation, blackout and voltage problem and various event/alarm features enhance safety of your storage.




Main Features

PHARMACEUTICAL SERIES

Up and down as you wish

1. REMOVABLE COATING SHELF

Storage compartment is adjustable by removable shelves for various heights of container. Every shelf has air circulation holes for keeping temperature uniformity.



Safety for you without hazardous chemical!

2. HAZARDOUS CHEMICAL REMOVER DEVICE

Specially designed device removes all unpleasant smells and hazardous chemicals for keeping comfortable working environment.



< Test Certificate >



PHARMACEUTICAL - CC0123

DETAIL & FEATURES

REFRIGERATOR SERIES




Air circulation system

Built-in two fans keep strong circulation and quickly recover target temperature even after numerous times of door open.

Rail type air hole drawer

Cold air can pass through the holes of drawer from the top to bottom for keeping uniform temperature inside of chamber. Removable drawer is convenient for sample transfer with minimal door open time.



Inner light

Light is controlled by button to enhance visibility of chamber inside.



Control system

Digital sensor control by Micro-processor for temperature and alarm setup.




Chart recorder

Record keeping for verification of temperature variation.



*OPTIONAL

Deodorizer

Comfortable work environment by removing unpleasant smell and hazardous chemicals.

*OPTIONAL - Stainless Steel Door



SPECIFICATIONS


REFRIGERATOR SERIES

BLOOD BANK Series

Series	BB0123	BB0150
Capacity	557 liters	1251 liters
Ext. Dimensions (WxDxH mm)	740 x 803 x 1910	1500 x 803 x 1910
Int. Dimensions (WxDxH mm)	610 x 630 x 1450	1370 x 630 x 1450
Weight (kg)	135	221
Drawer	6 EA solid stainless slide drawers	12 EA solid stainless slide drawers
Door	1 Double-paned tempered glass doors	2 Double-paned tempered glass doors
Temperature Range	Temperature is factory set at 4°C with a 0°C ~10°C	
Material	Interior all stainless steel	
Electrical	110V, 220V 60Hz, 230V 50Hz	
Certification	ISO9001 / 14001 / 13485 / KGMP	
Refrigeration	1/3 HP Hermetic comp	

DIMENSIONS

Preview
- Front -

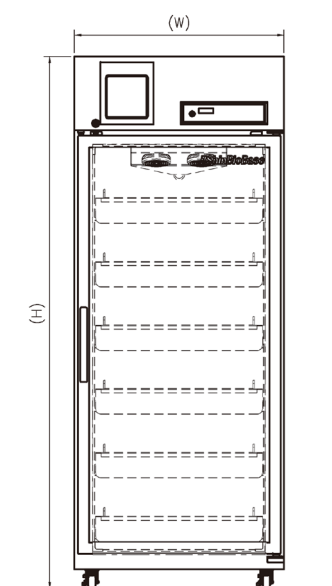


PHARMACEUTICAL Series

Series	CC0123	CC0150
Capacity	557 liters	1251 liters
Ext. Dimensions (WxDxH mm)	740 x 803 x 1910	1500 x 803 x 1910
Int. Dimensions (WxDxH mm)	610 x 630 x 1450	1370 x 630 x 1450
Weight (kg)	119	173
Shelf	4 EA	8 EA
Door	1 Double-paned tempered glass doors	2 Double-paned tempered glass doors
Temperature Range	Temperature is factory set at 4°C with a 0°C ~13°C	
Material	Interior all stainless steel	
Electrical	110V, 220V 60Hz, 230V 50Hz	
Certification	ISO9001 / 14001 / 13485 / KGMP	
Refrigeration	1/3 HP Hermetic comp	

DIMENSIONS

Preview
- Side -

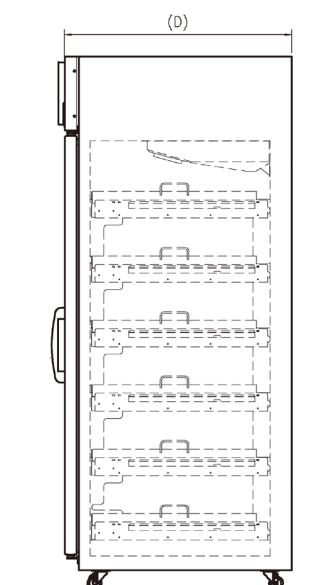

ilShinBioBase

Since 1988



Product Inquiry

Base	Address	Telephone	Fax
Overseas Sales Department	Lee Jong Ho / Deputy General Manager – jhlee@1sbb.com 84 Samyuksa-ro 548 Street, Dongduchon city, Kyungki do, Korea. ZIP 11341	+82-70-4354-3951	+82-70-7950-3951

ilShinBioBase Locations

Base	Address	Telephone	Fax
본사 및 생산	경기도 동두천시 삼육사로 548번길 84	031-867-1384	070-7950-3911
서울/경기지사	서울특별시 중랑구 중랑천로 77	1577-4053	02-491-4073
수원지사	경기도 화성시 봉담읍 갈담초교길 113	031-298-8147	031-298-8149
대전지사	대전시 유성구 학하북로 25	042-824-1145/6	042-824-1147
영남지사	대구광역시 동구 동호로 75, 4F	070-4354-3977/5000	070-7950-3941
호남지사	전라북도 전주시 덕진구 안전로 108-4(중동)	063-237-5122	063-237-5123

Global website: www.1sbb.com